

Концевый выключатель

ELR.BB

Технические характеристики

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90

Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40

Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47 Казахстан (772)734-952-31 Таджикистан (992)427-82-92-69

 ATTUATORI


Technische Daten

Gehäuse:	Aluminium-Druckguß epoxydharz-pulverbeschichtet
Welle:	Edelstahl
Anzeige:	Optische Stellungsanzeige aus Polycarbonat zur Anzeige der Auf-/Zu-Position serienmäßig
Schrauben:	Edelstahl
Schutzart:	IP66
Temperaturbereich:	-20°C bis +70°C
Kabelverschraubung:	4 x 3/4" NPT
Schaltbereich:	0° bis 90°, bis zu 240° möglich
Befestigung:	VDI/VDE 3845, Flansch 30 x 80 und 30 x 130,
Elektrische Merkmale:	Anschluss über 8-polige Klemmleiste. Anschluss von mono- oder bistabilem Magnetventil serienmäßig möglich. Mit verschiedenen Sensoren lieferbar.

Technical data


Body:	Die cast aluminium powder coated
Cam shaft:	Stainless steel
Indicator:	Optical indicator for open-/closed-position, polycarbonate
Screws:	Stainless steel
Protection mode:	IP66
Temperature range:	-20°C to +70°C
Cable glands:	4 x 3/4" NPT
Work range:	0° to 90°, 240° possible
Assembling:	VDI/VDE 3845, flange 30 x 80 and 30 x 130,
Electrical data:	Connection with 8-pole terminal block. Mono- and bistable solenoid valve wiring possible. Several sensor types available.

Endlagenrückmeldung ELR.BB - Abmaße limit switchbox ELR.BB - dimensions

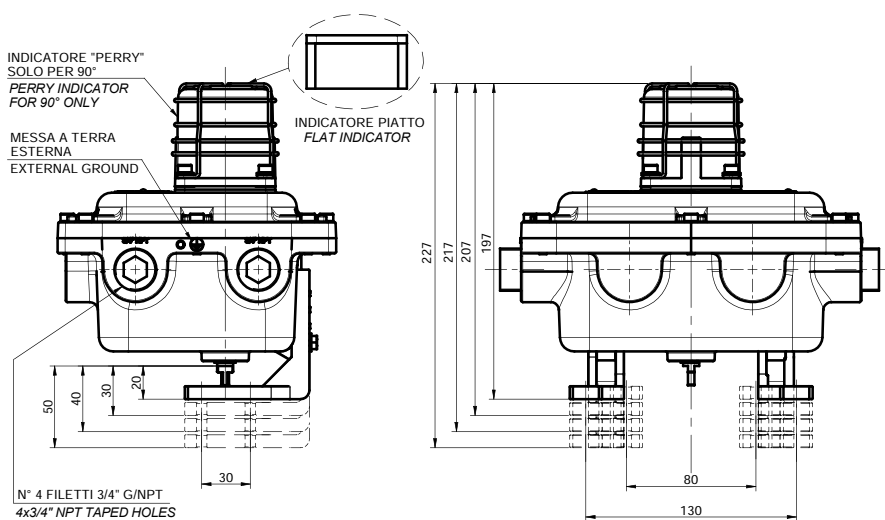

II2 GD EEx d IIB T6 IP66 T 85° C

CE 0722 CEx 03 ATEX 302

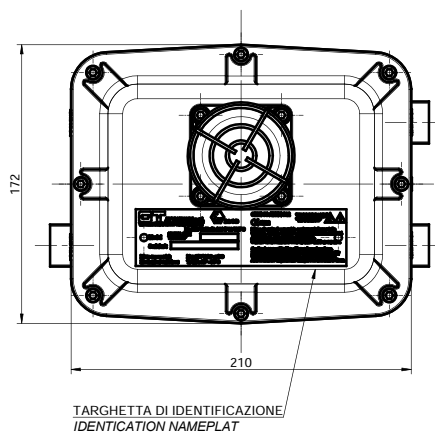

ELR.BB.M2

Sensor:
2 x Mikroschalter
2 x Microswitch


OMROM SSG-5 L2P
max. ~250V 5A

ANSCHLUSSPLAN ELR.BB.M2

- 1 - com. Schalter A
- 2 - N.O. (Öffner) Schalter A
- 3 - N.C. (Schließer) Schalter A
- 4 - com. Schalter B
- 5 - N.O. (Öffner) Schalter B
- 6 - N.C. (Schließer) Schalter B

BOARD ELR.BB.M2 connection

- 1 - commone micro switch A
- 2 - N.O. (normally open) micro switch A
- 3 - N.C. (normally closed) micro switch A
- 4 - commone micro switch B
- 5 - N.O. (normally open) micro switch B
- 6 - N.C. (normally closed) micro switch B

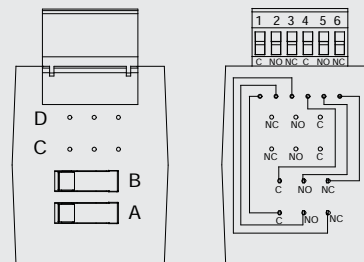

ELR.BB.M4

Sensor:
4 x Mikroschalter
4 x Microswitch


OMROM SSG-5 L2P
max. ~250V 5A

ANSCHLUSSPLAN ELR.BB.M4

- 1 - com. Schalter C
- 2 - N.O. (Öffner) Schalter C
- 3 - N.C. (Schließer) Schalter C
- 4 - com. Schalter D
- 5 - N.O. (Öffner) Schalter D
- 6 - N.C. (Schließer) Schalter D

BOARD ELR.BB.M4 connection

- 1 - commone micro switch C
- 2 - N.O. (normally open) micro switch C
- 3 - N.C. (normally closed) micro switch C
- 4 - commone micro switch D
- 5 - N.O. (normally open) micro switch D
- 6 - N.C. (normally closed) micro switch D

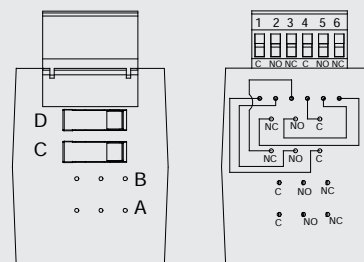

ELR.BB.I2

Sensor:
2 x induktiver Sensor
2 x inductive sensor


P+F NJ2-12GM40_E2
10-60 VDC max. 200mA

ANSCHLUSSPLAN ELR.BB.M4

- 1 - Betriebs-Spg. Schalter C
- 2 - Minus Schalter C
- 3 - PNP Plus Ausgang Schalter C
- 4 - Betriebs-Spg. Schalter D
- 5 - Minus Schalter D
- 6 - PNP Plus Ausgang Schalter D

BOARD ELR.BB.I2 connection


- 1 - Supply of C sensor
- 2 - C negative ground
- 3 - PNP positive output for user
- 4 - Supply of D sensor
- 5 - D negative ground
- 6 - PNP positive output for user



Mit optischen Anzeigedom
with optical indicator



Mit skalierteter Anzeige
with scaled display

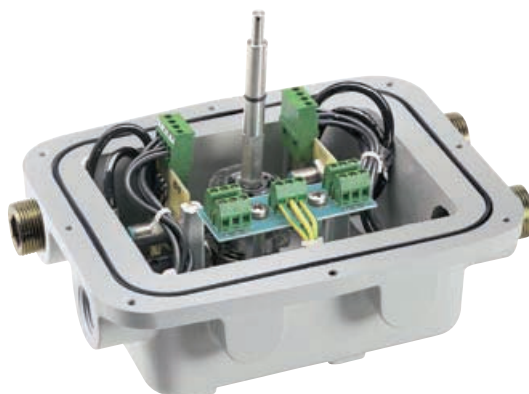

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90

Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40

Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47 Казахстан (772)734-952-31 Таджикистан (992)427-82-92-69

Единый адрес для всех регионов: grf@nt-rt.ru || www.gtattuatori.nt-rt.ru